


HT54-18X (N) Full Black

High Efficiency ZERO LID and TOPCON cell with Half-cut Technology

Big Size: Cell 182mm × 91mm Monocrystalline

415W / 420W

425W / 430W / 435W

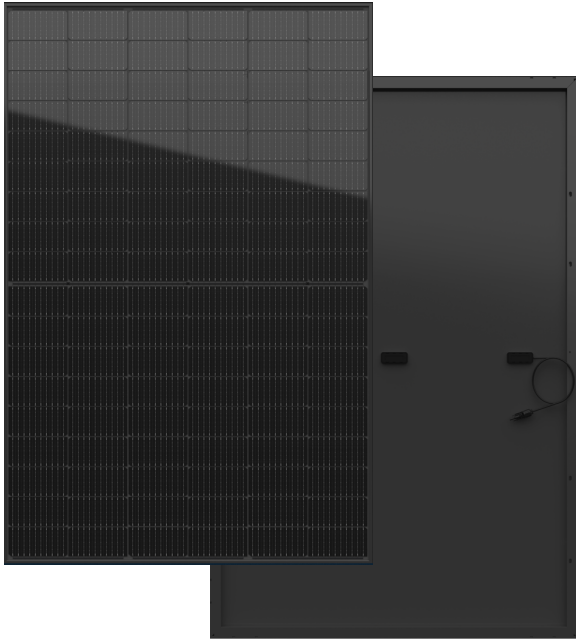

10-30% Additional Power Generation

10-30% additional power generation comparing with conventional P-type module



ZERO LID (Light Induced Degradation)

N-type solar cell has no LID naturally which can increase power generation



Lower LCOE

Higher power output and lower BOS cost



Better Weak Illumination Response

Higher power output even under low-light environment



Better Temperature Coefficient

Higher power generation under normal working conditions



Enhanced Mechanical Load

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).

■ Module Efficiency
22.3%

■ No.of Cells
108(6 × 18)

■ Weight
21.0kg

■ Dimensions
1724±2mm × 1134±2mm × 30mm

Comprehensive and First-rate Certification System

IEC61215: 2016.IEC61730: 2016 Latest Standard ISO14001 and ISO45001, meeting the highest international standards Strict quality control



Shanghai Aerospace Automobile Electromechanical Co., Ltd.

www.htsolar.com.tr

Turkey HT Solar Energy Joint Stock Company / Lianyungang ShenZhou New Energy Co., Ltd.

* Copyright@2022 V3 Plus Specifications are subject to change without further notification



Electrical Characteristics

Module	HT54-18X (N)				
Maximum Power at STC (Pmax)	415W	420W	425W	430W	435W
Open - Circuit Voltage (Voc)	38.0V	38.1V	38.2V	38.3V	38.4V
Short - Circuit Current (Isc)	13.99A	14.07A	14.15A	14.23A	14.31A
Optimum Operating Voltage (Vmp)	31.3V	31.5V	31.7V	31.9V	32.0V
Optimum Operating Current (Imp)	13.26A	13.34A	13.42A	13.50A	13.60A
Module efficiency	21.23%	21.48%	21.74%	21.99%	22.3%
Power Tolerance	0 ~ + 5W				
Maximum System Voltage	1500V DC (UL / IEC)				
Maximum Series Fuse Rating	25A/30A				
Operating Temperature	-40 °C to +85 °C				

* STC: Irradiance 1000W/m², module temperature 25, AM=1.5
Optional black frame or white frame module according to customer requirements

NMOT

Module	HT54-18X (N)				
Maximum Power	315W	319W	323W	327W	331W
Open - Circuit Voltage (Voc)	36.5V	36.6V	36.7V	36.8V	36.9V
Short - Circuit Current (Isc)	11.28A	11.34A	11.40A	11.47A	11.53A
Maximum Power Voltage (Vmp)	30.0V	30.2V	30.4V	30.7V	30.9V
Maximum Circuit Current (Imp)	10.50A	10.56A	10.62A	10.65A	10.71A
NMOT	45±2 °C				

* NMOT: Irradiance 800W/m², ambient temperature 20°C, wind speed 1m/s

Mechanical Characteristics

Solar Cells	Monocrystalline 182 × 91mm
No. of Cells	108(6 × 18)
Dimensions	1724±2mm × 1134±2mm × 30mm
Weight	21.0kg
Front Glass	High transmission tempered glass; thickness; 3.2mm
Frame	Anodized aluminium alloy
Junction Box	IP68
Cable	4mm ² (UL / IEC) length; (+) 400mm (-) 200mm / length can be customized
Connectors	MC ₄ / MC ₄ compatible
Packaging Configuration	36pcs / box, 936pcs / 40'HQ container

Temperature Characteristics


Temperature Coefficient of Pmax	-0.29%/°C
Temperature Coefficient of Voc	-0.23%/°C
Temperature Coefficient of Isc	+0.041%/°C

Warranty

12 - years
product warranty


30 - years
warranty on power output

Specific information is referred to the product quality guarantee

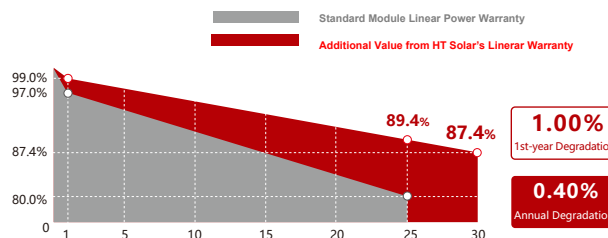

The module recycling should be carried out by the professional institutions at the end of module life cycle

Engineering Drawing

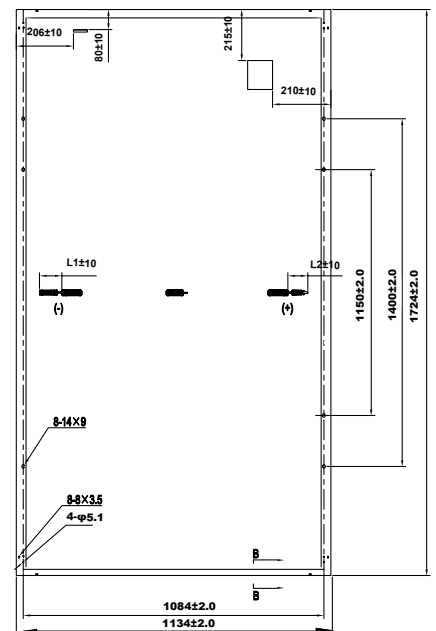

IV Curves

