


Jupiter

HT54-18X (ND)-F Double Glass

High Efficiency Lower LID and TOPCon cell with Half-cut Technology
Big Size : Cell 182mm × 91.875mm Monocrystalline

430W / 435W

440W / 445W / 450W

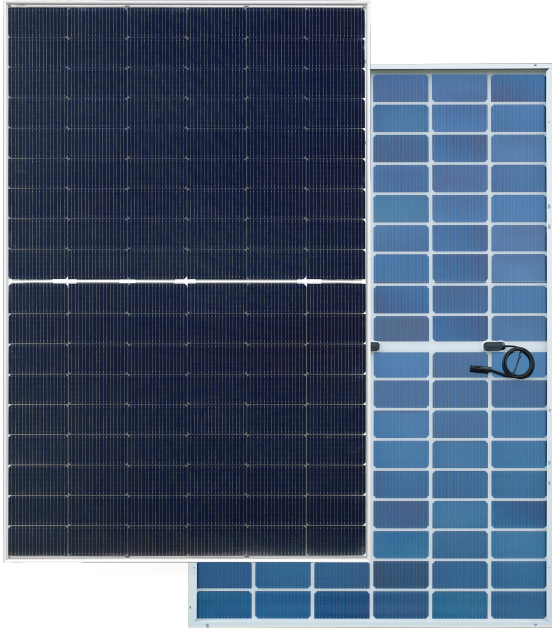

10-30% Additional Power Generation

10-30% additional power generation comparing with conventional P-type module



Lower LID (Light Induced Degradation)

N-type modules with Tunnel Oxide Passivating Contacts (TOPCon) technology offer lower LID/LeTID degradation and better low light performance



Lower LCOE

Higher power output and lower BOS cost



Better Weak Illumination Response

Higher power output even under low-light environment



Better Temperature Coefficient

Higher power generation under normal working conditions



Enhanced Mechanical Load

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal)

■ Module Efficiency
23.0%

■ No. of Cells
108(6 × 18)

■ Weight
24.0±0.5kg

■ Dimensions
1722mm × 1134mm × 30mm

Comprehensive and First-rate Certification System

IEC61215: 2021 . IEC61730: 2023 . UL61730: 2017 . IEC62804: 2015
ISO9001 . ISO14001 . and . ISO45001



Electrical Characteristics

Module	HT54-18X(ND)-F				
Maximum Power at STC (Pmax)	430W	435W	440W	445W	450W
Open - Circuit Voltage (Voc)	38.3V	38.4V	38.6V	38.7V	38.9V
Short - Circuit Current (Isc)	14.23A	14.31A	14.39A	14.47A	14.55A
Optimum Operating Voltage (Vmp)	31.9V	32.0V	32.0V	32.3V	32.5V
Optimum Operating Current (Imp)	13.50A	13.60A	13.70A	13.80A	13.84A
Module efficiency	22.0%	22.3%	22.5%	22.8%	23.0%
Power Tolerance	0 ~ + 3%				
Maximum System Voltage	1500V DC (UL / IEC)				
Maximum Series Fuse Rating	25A				
Operating Temperature	-40 C to +85 C				

* STC: Irradiance 1000W/m², module temperature 25, AM=1.5
Optional black frame or white frame module according to customer requirements

NMOT


Module	HT54-18X(ND)-F (Bifaciality 85±5%)				
Maximum Power	327W	331W	335W	339W	343W
Open - Circuit Voltage (Voc)	36.8V	36.9V	37.1V	37.2V	37.4V
Short - Circuit Current (Isc)	11.47A	11.53A	11.59A	11.65A	11.71A
Optimum Operating Voltage (Vmp)	30.7V	30.9V	31.1V	31.3V	31.5V
Optimum Operating Current (Imp)	10.65A	10.71A	10.77A	10.83A	10.89A
NMOT	45±2 C				

* NMOT: Irradiance 800W/m², ambient temperature 20°C, wind speed 1m/s

Mechanical Characteristics

Solar Cells	Monocrystalline 182 × 91.875mm
No. of Cells	108(6 × 18)
Dimensions	1722mm × 1134mm × 30mm
Weight	24.0±0.5kg
Front Glass	High transmission tempered glass; thickness; 2.0mm
Frame	Anodized aluminium alloy
Junction Box	IP68
Cable	4mm ² (UL / IEC) length : (+)400mm, (-)200mm / length can be customized
Connectors	MC4/MC4 Compatible
Packaging Configuration	36pcs / box, 936pcs / 40'HQ container

Engineering Drawing

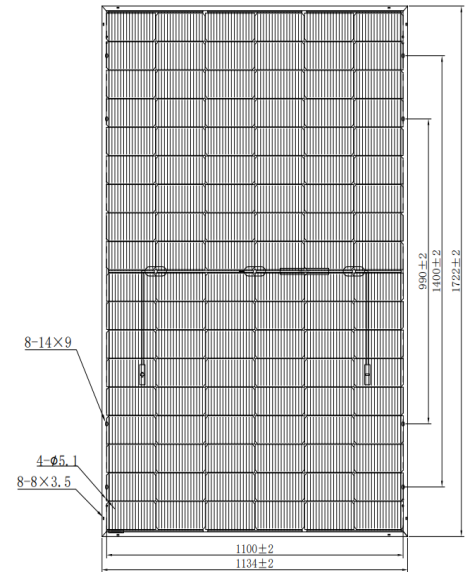

Temperature Characteristics


Temperature Coefficient of Pmax	-0.29%/°C
Temperature Coefficient of Voc	-0.23%/°C
Temperature Coefficient of Isc	+0.046%/°C

Warranty


15 - years
product warranty

30 - years
warranty on power output

Specific information is referred to the product quality guarantee

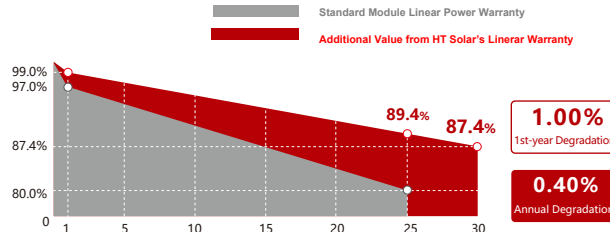

IV Curves

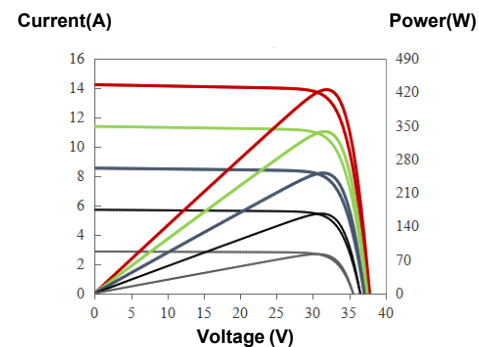

The module recycling should be carried out by the professional institutions at the end of module life cycle