


MULTIWAY+

HT60-210(PD)-F Double Glass

High Efficiency Low LID and Bifacial cell with Half-cut Technology
Big Size: Cell 210 × 105 Monocrystalline

585W / 590W

595W / 600W / 605W

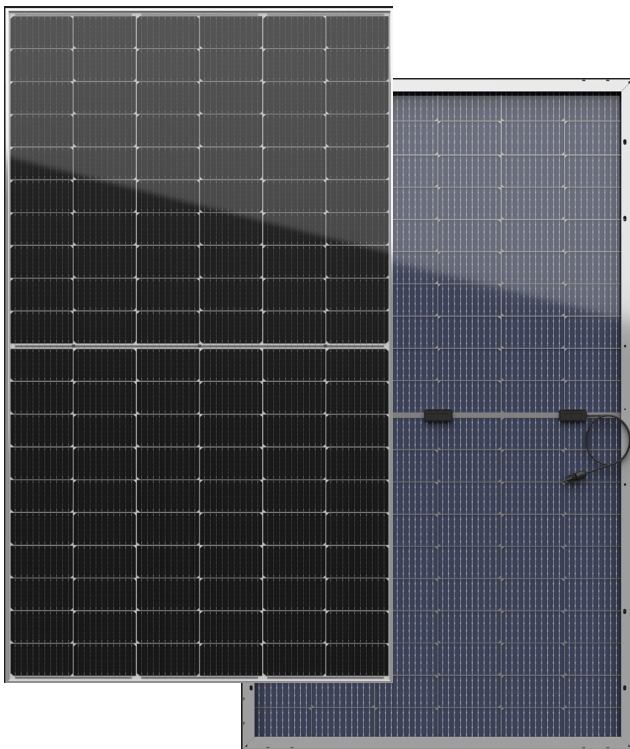

Half cut cell technology can reduce the internal power loss and improve component overall power. Excellent heat dissipation avoids hot spot production.



MBB The optimized number and width of main gate lines, Maximize the light receiving area of components and reduce component power consumption



Designed for high voltage systems of up to 1500 VDC, increasing the string length of solar systems and saving on BoS costs



Entire module certified to with stand extreme wind (2400 Pa) and snow loads (5400 Pa)



All the modules are sorted and packaged by amperage, reducing mismatch losses and maximizing system output.

12Ys

products

30Ys

warranty on power output

PID

PID resistant

5W

positive tolerance 0/+5W guaranteed

EL

microcrack resistant high performance Double glass structure enhance reliability, triple EL tested of high quality control.

Comprehensive and First-rate Certification System

IEC61215: 2021, IEC61730: 2023, UL61730: 2017, IEC62804: 2015
ISO9001 ISO14001 and ISO45001



■ Module Efficiency
21.4%

■ No.of Cells
120 (6 × 20)

■ Weight
34.9±0.5kg

■ Dimensions
2172mm × 1303mm × 35mm

Electrical Characteristics

Module	HT60-210(PD)-F				
Maximum Power at STC (Pmax)	585W	590W	595W	600W	605W
Open - Circuit Voltage (Voc)	40.7V	40.9V	41.1V	41.3V	41.5V
Short - Circuit Current (Isc)	18.32A	18.37A	18.42A	18.47A	18.52A
Optimum Operating Voltage (Vmp)	34.3V	34.5V	34.7V	34.9V	35.1V
Optimum Operating Current (Imp)	17.06A	17.11A	17.15A	17.20A	17.25A
Module Efficiency	20.7%	20.9%	21.1%	21.2%	21.4%
Power Tolerance	0 ~ + 3%				
Maximum System Voltage	1500V DC (UL / IEC)				
Maximum Series Fuse Rating	30A				
Operating Temperature	-40 °C to +85 °C				

* STC: Irradiance 1000W/m², module temperature 25, AM=1.5
Optional black frame or white frame module according to customer requirements

NMOT

Module	HT60-210(PD)-F (Bifaciality 75±5%)				
Maximum Power	443W	447W	451W	455W	458W
Open - Circuit Voltage (Voc)	39.0V	39.2V	39.4V	39.6V	39.8V
Short - Circuit Current (Isc)	14.75A	14.79A	14.84A	14.88A	14.92A
Maximum Power Voltage (Vmp)	32.9V	33.1V	33.3V	33.4V	33.6V
Maximum Power Current (Imp)	13.47A	13.50A	13.54A	13.62A	13.63A
NMOT	45±2 °C				

* NMOT: Irradiance 800W/m², ambient temperature 20°C, wind speed 1m/s

Mechanical Characteristics

Solar Cells	Monocrystalline 210× 105mm
No.of Cells	120(6 × 20)
Dimensions	2172mm × 1303mm × 35mm
Weight	34.9±0.5kg
Front Glass	High transmission tempered glass
Frame	Anodized aluminium alloy
Junction Box	IP68
Cable	4mm ² (UL / IEC) length : (+) 400mm (-) 200mm / length can be customized
Connectors	MC ₄ / MC ₄ compatible
Packaging Configuration	31pcs / box, 558pcs / 40'HQ container

Temperature Characteristics

Temperature Coefficient of Pmax	-0.31%/°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Isc	0.039%/°C


Warranty

12 - year
product warranty


30 - year
warranty on power output

Specific information is referred to the product quality guarantee

The module recycling should be carried out by the professional institutions at the end of module life cycle

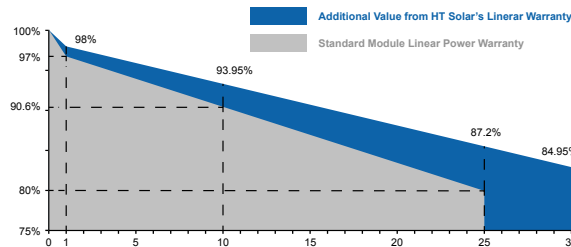

Engineering Drawing

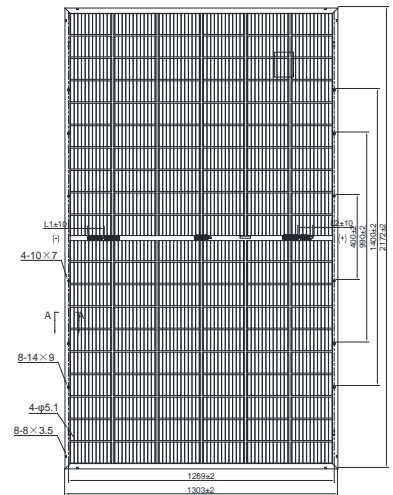

IV Curves

