


# MULTIWAY+

## HT72-18X

High Efficiency Low LID and PERC cell with Half-cut Technology  
Big Size : Cell 182mm × 91mm Monocrystalline

**540W / 545W**

**550W / 555W / 560W**

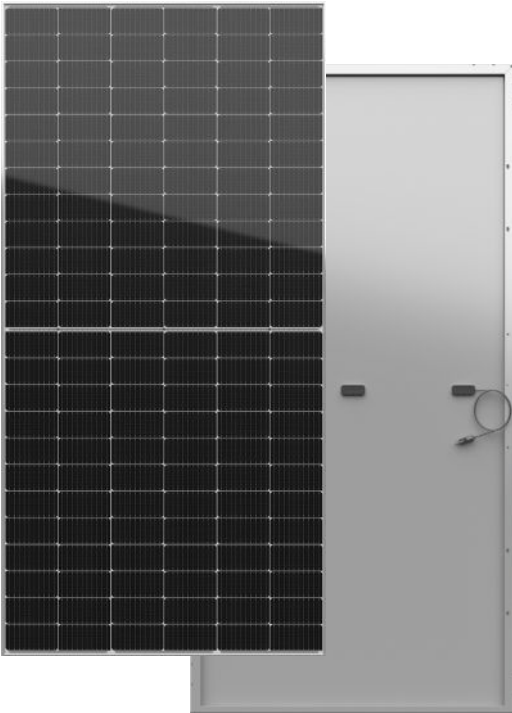

Half cut cell technology can reduce the internal power loss and improve component overall power. Excellent heat dissipation avoids hot spot production.



10BB The optimized number and width of main gate lines, Maximize the light receiving area of components and reduce component power consumption.



Designed for high voltage systems of up to 1500 VDC, increasing the string length of solar systems and saving on BOS costs.



Entire module certified to with stand extreme wind (2400 Pa) and snow loads (5400 Pa).



All the modules are sorted and packaged by amperage, reducing mismatch losses and maximizing system output.

**12Ys**

products

**25Ys**

warranty on power output

**PID**

PID resistant

**5W**

positive tolerance 0/+5W guaranteed

**EL**

microcrack resistant high performance White backsheet structure enhance reliability, triple EL tested of high quality control.

### Comprehensive and First-rate Certification System

IEC61215: 2016.IEC61730: 2016 Latest Standard ISO14001 and ISO45001, meeting the highest international standards Strict quality control



Module Efficiency  
**21.7%**

No.of Cells  
**144 (6 × 24)**

Weight  
**27±0.5kg**

Dimensions  
**2278mm × 1134mm × 30mm**

# MULTIWAY+

Better Choice For Higher Efficiency



## Electrical Characteristics

Module	HT72-18X				
Maximum Power at STC (Pmax)	540W	545W	550W	555W	560W
Open - Circuit Voltage (Voc)	49.50V	49.65V	49.80V	49.95V	50.10V
Short - Circuit Current (Isc)	13.90A	13.95A	14.00A	14.07A	14.14A
Optimum Operating Voltage (Vmp)	41.65V	41.80V	41.95V	42.10V	45.25V
Optimum Operating Current (Imp)	12.97A	13.05A	13.12A	13.20A	13.27A
Module efficiency	20.9%	21.1%	21.3%	21.5%	21.7%
Power Tolerance	0 ~ + 3%				
Maximum System Voltage	1500V DC (UL / IEC)				
Maximum Series Fuse Rating	25A				
Operating Temperature					

\* STC: Irradiance 1000W/m<sup>2</sup>, module temperature 25, AM=1.5  
Optional black frame or white frame module according to customer requirements

## Engineering Drawing

## Mechanical Characteristics

Solar Cells	Monocrystalline 182 × 91mm
No.of Cells	144 (6 × 24)
Dimensions	2278mm × 1134mm × 30mm
Weight	27±0.5kg
Front Glass	High transmission tempered glass; thickness; 3.2mm
Frame	Anodized aluminium alloy
Junction Box	IP68
Cable	4mm <sup>2</sup> (UL / IEC) length
Connectors	
Packaging Configuration	